



TYPICAL CROSS SECTION

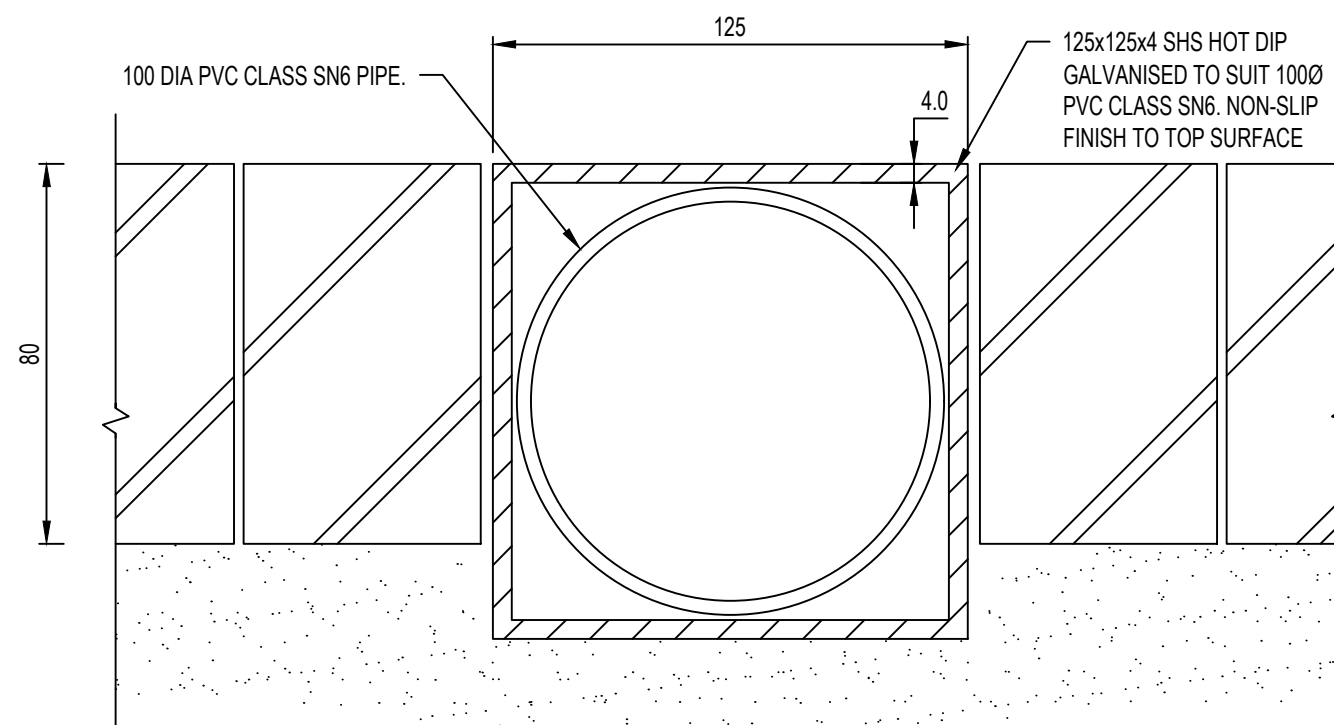


TYPICAL SHS CROSS SECTION

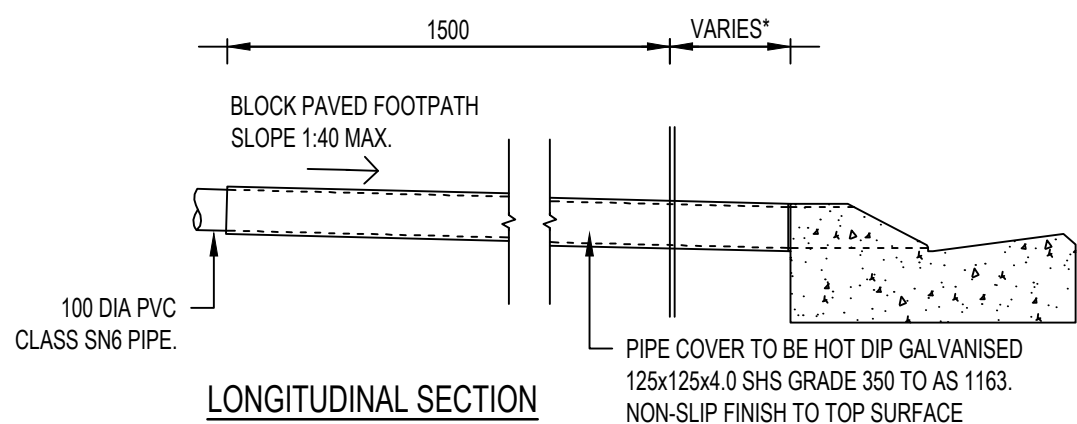


LONGITUDINAL SECTION

(BLOCK PAVED FOOTPATH NOT SHOWN)

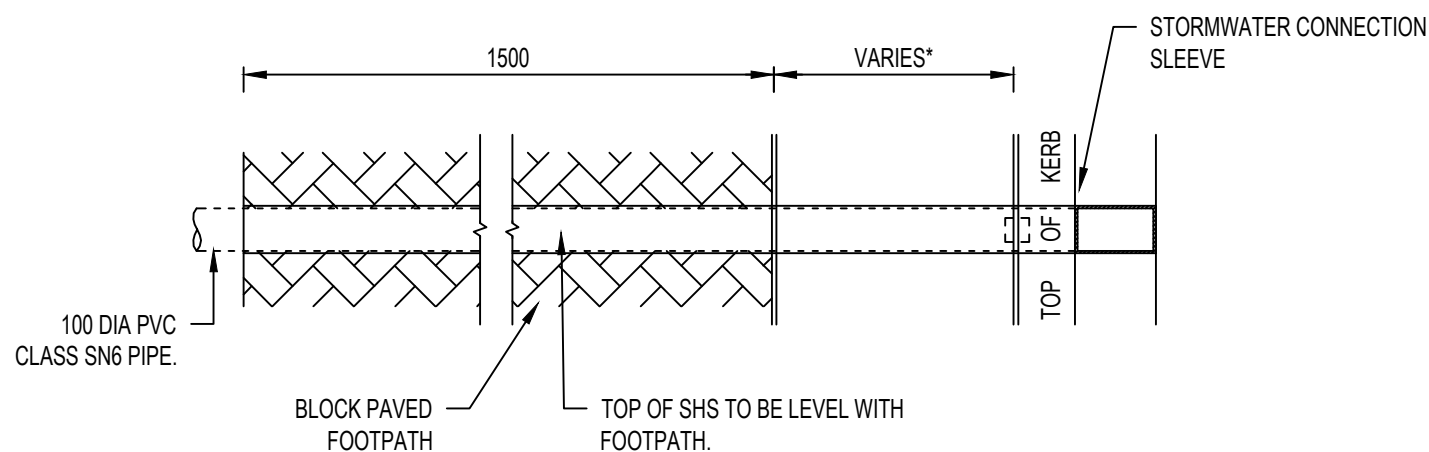

PLAN VIEW

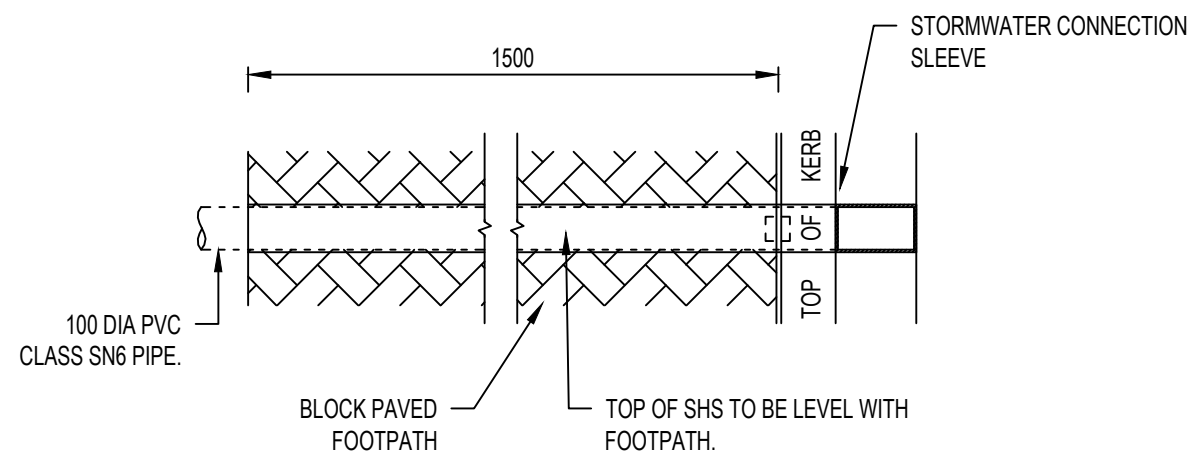

ALTERNATE PLAN VIEW

\* DISTANCE TO KERB MAY VARY, REFER TO TYPICAL LAYOUT DRAWINGS.

ALL MEASUREMENTS IN MILLIMETRES

NOTES:

1. LOCATION OF HOUSE DRAINS WITHIN PROPERTY BOUNDARY TO BE MARKED WITH AN APPROVED TAPE TIED TO EXTEND THROUGH FINISHED SURFACE FOR EASY LOCATION BY BUILDERS.
2. PM2/20 QG OR DOLOMITE SAND BACKFILL TO BE USED.
3. REFER SD115 FOR DETAILS OF KERB ADAPTOR.
4. PROPRIETARY GALVANISED 'TOP HAT' SECTION IS SUITABLE ALTERNATIVE.

REV	DESCRIPTION	DATE	DES	DRW	APP
C	MINOR AMENDMENTS	18.07.2017	JZ	JC	DSL
B	ISSUED FOR REVIEW	10.05.2016	JZ	DL	DSL
A	ISSUED FOR REVIEW	15.03.2016	JZ	DL	DSL

THIS PROJECT HAS BEEN ASSISTED BY THE LOCAL GOVERNMENT RESEARCH AND DEVELOPMENT SCHEME AND INSTITUTE OF PUBLIC WORKS ENGINEERING AUSTRALASIA

INFRASTRUCTURE GUIDELINES (SA)

SHEET TITLE  
**DRAIN STORMWATER ALLOTMENT TO KERB AND CHANNEL CONNECTION**

SCALE  
NTS @ A3

DRAWING No. **SD 380** REV **C**