


TYPICAL TRENCH AND BACKFILL -
NO GROUNDWATER

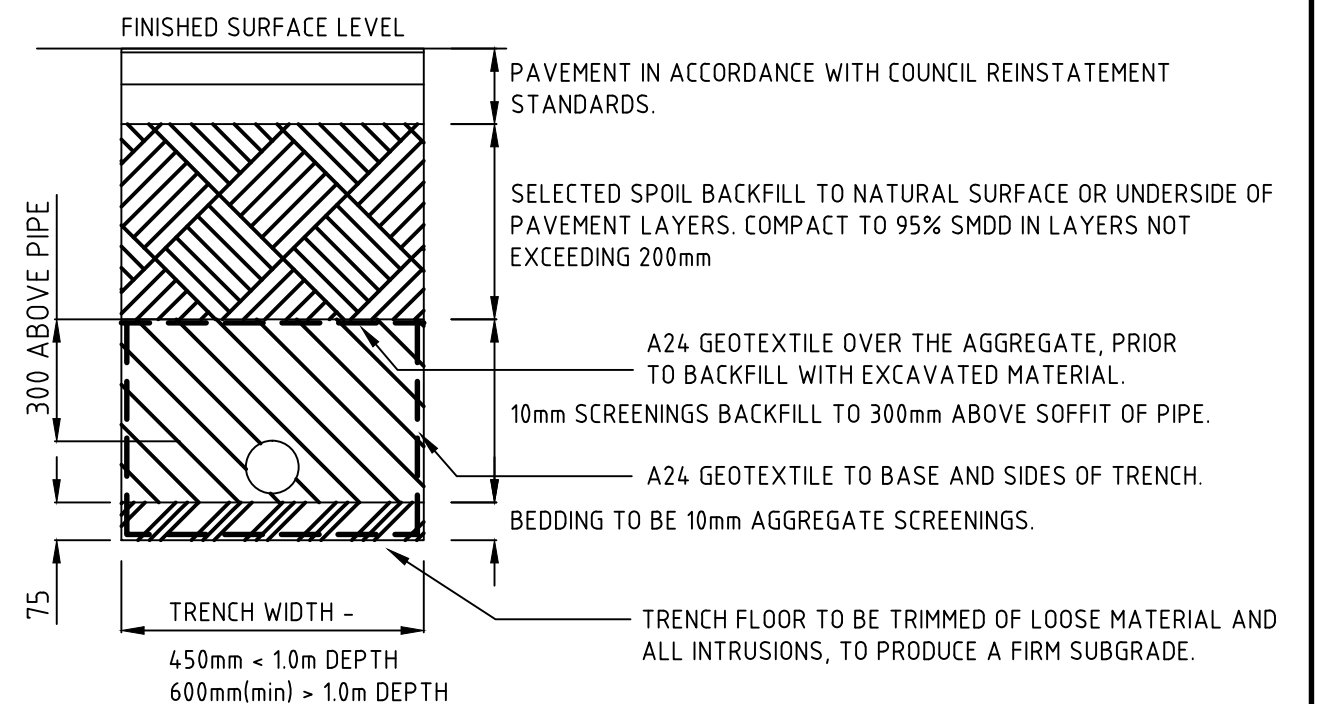

TYPICAL TRENCH AND BACKFILL -
IN GROUNDWATER

NOTES:

1. PIPES TO BE LOCATED CENTRALLY IN TRENCH
2. TRENCH BASE TO BE FIRM AND TO HAVE CONSTANT GRADE.
3. UNEVEN TRENCHES ARE NOT ACCEPTABLE.
4. DEWATER TRENCH DURING CONSTRUCTION.

ALL MEASUREMENTS IN MILLIMETRES

						INFRASTRUCTURE GUIDELINES (SA)			
						SHEET TITLE			
						TRENCH AND BACKFILL DETAILS			
						CWMS			
B	MINOR AMENDMENTS	06.11.2018	AF	AF	MDH			SCALE	
A	MINOR AMENDMENTS	18.07.2017	JZ	JC	DSL			NTS @ A3	
REV	DESCRIPTION	DATE	DES	DRW	APP			DRAWING No.	
THIS PROJECT HAS BEEN ASSISTED BY THE LOCAL GOVERNMENT RESEARCH AND DEVELOPMENT SCHEME AND INSTITUTE OF PUBLIC WORKS ENGINEERING AUSTRALASIA								SD 700	
								REV	
								B	